

PREMIUM SHALLOW WELL JET PUMPS

APPLICATIONS

Ideal for the supply of fresh water to rural homes, farms, and cabins that have suction lifts down to 25'.

FEATURES & BENEFITS


- High performance shallow well jet pump able to handle the water demands of large homes, cottages, and farms
- Rugged cast iron casing for years of service and reliability
- Heavy-duty dual voltage (115/230 Volt) motor with capacitor for increased starting power
- Includes 30/50 Pressure Switch set to shut pump off automatically at 50 psi
- Glass-filled thermoplastic impeller and diffuser for superior performance and efficient water flow
- Tested and certified by CSA to UL 778 and CSA 108 for electrical safety and NSF/ANSI 372 for lead free compliance



Model	Item No.	UPC	HP	Volts	Amps	Intake	Discharge	Suction Lift	Discharge Pressure (PSI)				Max. Pressure (PSI)	Max. Head
									30	40	50	60		
RJS-50-PREM	602206	0 10121 14702 7	1/2	115/230	11.8 A @ 115 V 5.9 A @ 230 V	1-1/4" FNPT	1" FNPT	5'	12.6	10	6.1	2	65	150'
								15'	10	7.9	4	-	60	139'
								25'	6.9	6.2	2.5	-	55	127'
RJS-75-PREM	602207	0 10121 14704 1	3/4	115/230	14.4 A @ 115 V 7.2 A @ 230 V	1-1/4" FNPT	1" FNPT	5'	16.7	12.6	7.2	1.8	65	150'
								15'	13.1	10.2	4.7	-	60	139'
								25'	8.4	7.2	2.9	-	55	127'
RJS-100-PREM	602208	0 10121 14705 8	1	115/230	17.6 A @ 115 V 8.8 A @ 230 V	1-1/4" FNPT	1" FNPT	5'	23.2	16.8	10.6	3.5	65	150'
								15'	19.5	14.1	7.7	-	60	139'
								25'	13.3	11.5	5.3	-	55	127'

CARTON SPECIFICATIONS

Model	Length	Width	Height	Weight (lbs)	Carton Cubes (cu ft)	Pallet Quantity	Quantity per Layer	Layers per Pallet
RJS-50-PREM	10.5"	20.5"	10.25"	38	1.28	56	8	7
RJS-75-PREM	10.5"	20.5"	10.25"	39	1.28	56	8	7
RJS-100-PREM	10.5"	20.5"	10.25"	40	1.28	56	8	7

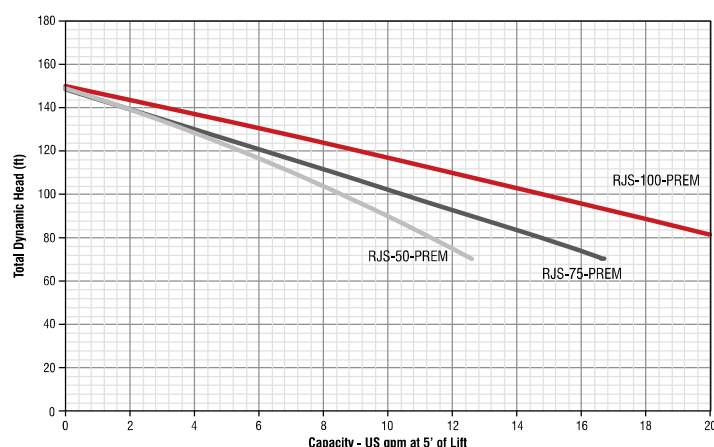

1/4" MNPT Pressure Gauge Included